



Attach Two SLX Wave Ports Together, Side by Side, Part #22957

Although it is not necessary that two Wave Ports be connected, some people may want to do this.

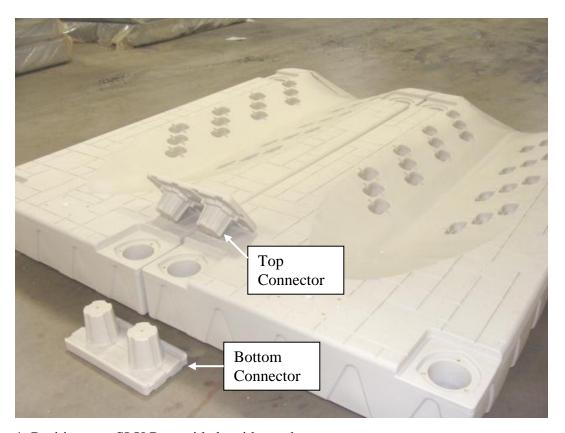

1. Position two SLX Ports side by side on the water.

2. Insert bottom connector into the front post holes of the SLX Port.

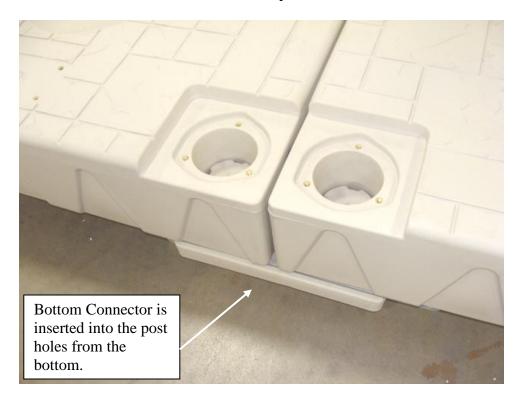

3. Insert the top connector into the post hole openings. Secure the connector pieces together using the $3/8 \times 1 \frac{1}{2}$ bolts and 3/8 fender washers. Repeat procedure at the rear of the port.

